



TACT SWITCH

P/N:TSB06161-H-1E00



SPECIFICATIONS

Funtion: Momentary action
 Contact Arrangement: SPST, Normally Open
 Termination: THD version

Mechanical

Actuation Force: 180±50grams
 Life Expectancy: 500,000 Operations

Electrical

Contact Rating: 50mA . 12V DC
 Dielectric Strength: 250V AC for 1 Min.
 Contact Resistance: 100mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Travel: 0.25±0.1mm

Environmental


Operating Temperature: -25~+70℃
 Relative Humidity: (40℃)≤70%RH

Materials


6.Socket White GP.PA66
 5.Cover: Copper with Nickelplate
 4.Stem: Black GP.PC
 3.Contact: Stainless Steel with Silver cladding
 2.Holder: Black GP.PA66
 1.Terminal: Copper with Silver Cladding

Packaging



Bulk Package
 Inner Package: Plastic bag
 Outter Package: Carton

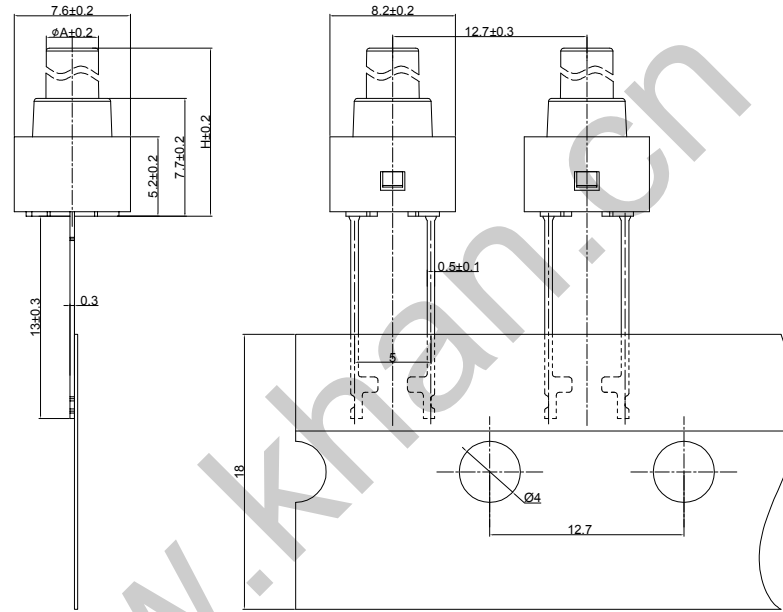

CIRCUIT DIAGRAM



P.C.B. LAYOUT

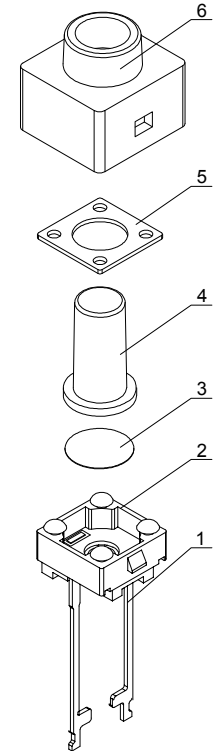

H	9	9.5	9.7	9.9	10	10.3	10.5	11	11.5	12	12.5	13	13.5	14
A	3.1	3.2	3.1	3.2	3.2	3.2	3	3.1	3.2	3.2	3.1	3.2	3	3.2
H	14.5	15	15.5	15.6	16	16.5	17	17	17.5	18	18.5	19	19.5	19.7
A	3.1	3.1	3.2	3.1	3.2	3.2	3.2	2	3	3.2	3	3.1	3	3
H	20.2	21	22	23	23.5	24	24.5	24.8	25	26	27.2	28	29	
A	3.2	3.1	3.2	3.1	3.2	3	3	3.1	3	3.2	3	2.9	3	



WENZHOU KHAN ELECTRONIC

VERSION

KH14FE22E


SCALE

5:1

SIZE

A4

PROJECTION



Dimnensions are shown:mm(inches)

2022.05.11

DESIGNED

Wei Lin

CHECKED

ZhongJu Peng

APPROVED

Johan Xu