

TACT SWITCH
P/N:KAN1-23



SPECIFICATIONS

Funtion: LOCK
Contact Arrangement: DPDT

Mechanical

Life Expectancy: 10,000 Operations

Electrical


Contact Rating: 0.3A @ 30V DC
Dielectric Strength: 500V AC for 1minute
Contact Resistance: 50mΩ Max.
Insulation Resistance: 500MΩ Min.

Environmental


Operating Temperature: -25~ +70 °C
Relative Humidity: (40 °C) ≤95%

Packaging


Bulk Package
Inner Package: Plastic bag
Outter Package: Carton

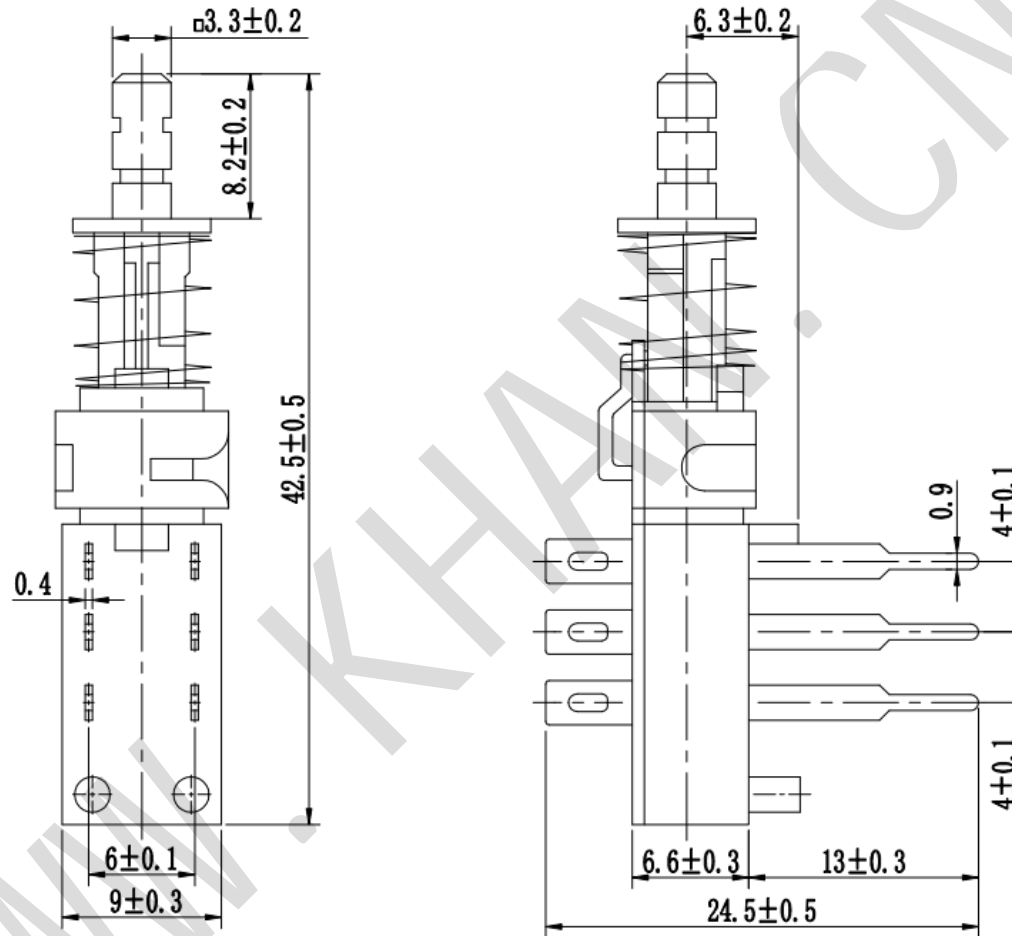

CIRCUIT DIAGRAM



P. C. B. LAYOUT



KANGHONG ELECTRONIC

VERSION		PROJECTION	DESIGN
KH14FE22E			
SCALE	SIZE	 Dimensions are shown:mm(inches)	DRAWN
1:1	A4		2014.02.20